



288310

288410

Description

Housing - Die cast aluminium housing material, powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Type - LED Outdoor.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

Friendly and quick solution to the never ending need to direct the light in a specific direction, adjustable fixture that can be oriented at 350° depending on the context and project application. The luminaire can be rotated on its axis giving different effects: direct, indirect and also wall washer, its adjustable flexibility allows you to choose the area or the object to illuminate. Completely dustproof. Protected against high pressure water jets.

Obiettivo

Soluzione amichevole e veloce all'esigenza infinita di indirizzare la luce in una direzione specifica, apparecchio orientabile e orientabile a 350° a seconda del contesto e dell'applicazione del progetto. L'apparecchio può essere ruotato sul suo asse dando diversi effetti: diretto, indiretto e anche wall washer, la sua flessibilità regolabile consente di scegliere l'area o l'oggetto da illuminare.

Completamente antipolvere.


Prote o contro getti d'acqua.



CODE	POWER	TYPE	IP	LUMENS	DIMENSION (DxHxB)
------	-------	------	----	--------	-------------------

288310	10W	SMD	65	90 lm/W	Ø25 x 800 x 70mm
--------	-----	-----	----	---------	------------------


288410	10W	SMD	65	90 lm/W	Ø25 x 600 x 245 x 70mm
--------	-----	-----	----	---------	------------------------

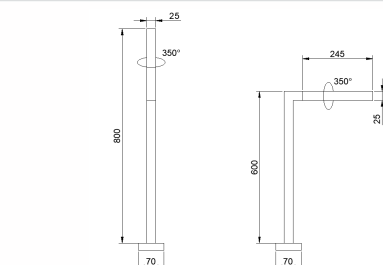

Color Options

B

Beam Angle



2700K

3000K

4000K

5000K

6000K

