

290112 / 18 / 24 / 30 / 40 / 50

Description

Material - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Anti-glare PMMA diffuser, UV stabilized with a better light output.

Mounting - LED Surface Wall mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

Simple and easy appearance in line with contemporary aesthetic concept, The product has the structure and appearance design patent. High efficiency constant current driver, ensure the light source is maximum used. Environmental friendly thanks to the energy and consumption savings guaranteed from its characteristics. Completely dustproof. Is not protected against liquid penetration.




Obbiettivo

Aspetto semplice e semplice in linea con il concetto estetico contemporaneo, il prodotto ha il brevetto di struttura e aspetto estetico. Driver di corrente costante ad alta efficienza, assicurarsi che la sorgente luminosa sia utilizzata al massimo. Rispetto dell'ambiente grazie al risparmio di energia e di consumo garantito dalle sue caratteristiche.

Completamente antipolvere. Non è prote o contro la penetrazione di liquidi.



	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	290112	12W	SMD	40	100lm/W	600 x 50 x 40mm
	290118	18W	SMD	40	100lm/W	900 x 50 x 40mm
	290124	24W	SMD	40	100lm/W	1200 x 50 x 40mm
	290130	30W	SMD	40	100lm/W	1500 x 50 x 40mm
	290140	40W	SMD	40	100lm/W	2000 x 50 x 40mm
	290150	50W	SMD	40	100lm/W	3000 x 50 x 40mm

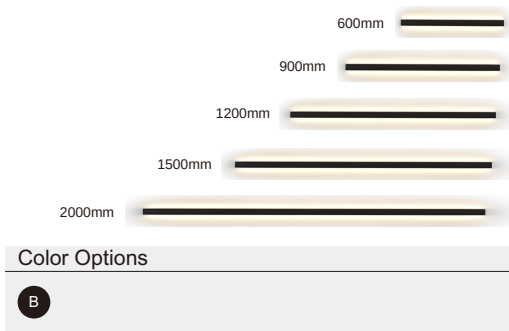

2700K
3000K
4000K
5000K
6000K



IK05

CRI >90

-20° C
55° C

85~265V
50/60Hz

