



290208 / 10 / 12 / 15

### Description

**Material** - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

**Diffuser** - Anti-glare PMMA diffuser, UV stabilized with a better light output.

**Mounting** - LED Surface Wall mounted.

**Standards** - Manufactured in accordance with IEC 62722.

**LED** - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

### Objective

Simple and easy appearance in line with contemporary aesthetic concept, The product has the structure and appearance design patent. High efficiency constant current driver, ensure the light source is maximum used. Environmental friendly thanks to the energy and consumption savings guaranteed from its characteristics. Completely dustproof. Is not protected against liquid penetration.

### Obbiettivo


Aspetto semplice e semplice in linea con il concetto estetico contemporaneo, il prodotto ha il brevetto di struttura e aspetto estetico. Driver di corrente costante ad alta efficienza, assicurarsi che la sorgente luminosa sia utilizzata al massimo. Rispetto dell'ambiente grazie al risparmio di energia e di consumo garantito dalle sue caratteristiche.

Completamente antipolvere.

Non è prote o contro la penetrazione di liquidi.




|  | CODE   | POWER | CHIP | IP | LUMENS  | DIMENSION        |
|--|--------|-------|------|----|---------|------------------|
|  | 290208 | 8W    | SMD  | 40 | 100lm/W | 900 x 35 x 60mm  |
|  | 290210 | 10W   | SMD  | 40 | 100lm/W | 1200 x 35 x 60mm |
|  | 290212 | 12W   | SMD  | 40 | 100lm/W | 1500 x 35 x 60mm |
|  | 290215 | 15W   | SMD  | 40 | 100lm/W | 2000 x 35 x 60mm |

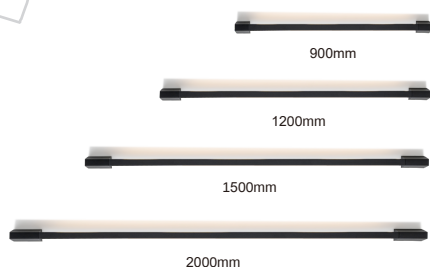

Color Options

B

Beam Angle

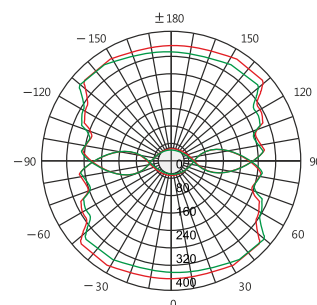

2700K  
3000K  
4000K  
5000K  
6000K



IK05

CRI >90

-20° C  
55° C

85~265V  
50/60Hz

