

113712

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - PMMA Lens diffuser, UV stabilized with a better light output.

Reflector - Aluminium reflector, UV stabilized.

Mounting - LED Ceiling Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective



This spotlight is one of the basic recessed spotlight range. It is design to give a warm and relaxing ambience. As for energy consumption this LED lights is surely saves and using less consumption due to its lighting capabilities. This is suitable for a wide variety of applications. Protected against the penetration by solid bodies with dimensions greater than $\varnothing 1$ mm. Protected against sprays of water.

Obiettivo

Il faretto per far fuoco è uno dei faretti da incasso di base. È design per dare un ambiente caldo e rilassante. Per quanto riguarda il consumo di energia, questa luce a LED è sicuramente un risparmio e utilizza meno consumi grazie alle sue capacità di illuminazione. Questo è adatto per un'ampia varietà di applicazioni. Protetto contro la penetrazione di corpi solidi di dimensioni superiori a $\varnothing 1$ mm. Protetto contro gli spruzzi d'acqua.

CODE	POWER	CHIP	IP	LUMENS	DIMENSION
------	-------	------	----	--------	-----------

113712	12W	COB	44	95 lm/W	$\varnothing 86 \times 79\text{mm}$ $\varnothing 75\text{mm}$
--------	-----	-----	----	---------	---

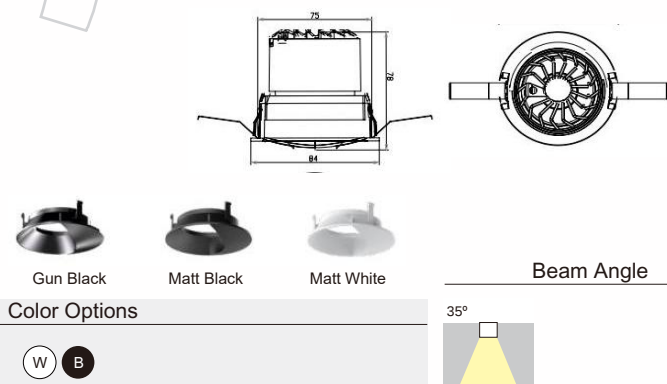

2700K
3000K
4000K
5000K
6000K

DALI
1-10 Dimming
Phase Dimming



LED



CRI >90

-20° C
55° C

200~220V
50/60Hz

