



124707 / 15 / 20 / 25

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - PMMA lens, UV stabilized with a better light output.

Reflector - Aluminium reflector, UV stabilized.

Mounting - LED Ceiling Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

This luminaire is a good choice in matter of design and power. This high efficiency of the LED source ensures excellent performances and low consumptions. Energy and economy savings are a little advantage compared to the design of this item.


Completely dustproof. Protected against jets of water.

Obiettivo

Questo apparecchio è una buona scelta in termini di design e potenza. Questa elevata efficienza della sorgente LED garantisce prestazioni eccellenti e bassi consumi. Risparmio energetico ed economico sono un piccolo vantaggio rispetto al design di questo prodotto.


Completamente antipolvere. Prote o contro ge d'acqua.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	124707	7W	COB	44	95 lm/W	Ø89 x H45.5mm Ø80mm
	124715	15W	COB	44	95 lm/W	Ø110 x H48.5mm Ø100mm
	124720	20W	COB	44	95 lm/W	Ø140 x H52.5mm Ø120mm
	124725	25W	COB	44	95 lm/W	Ø165 x H55.5mm Ø150mm

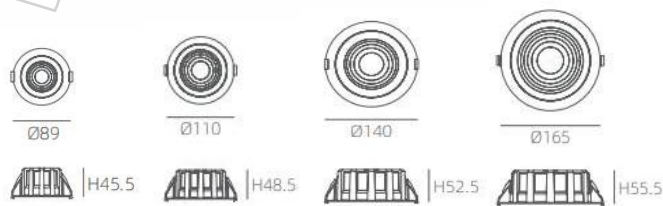

Beam Angle

Color Options

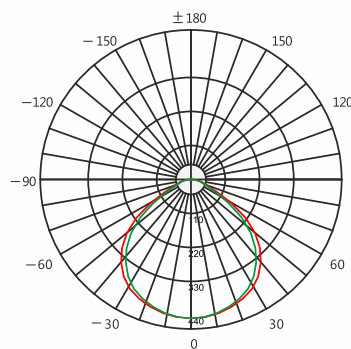

2700K
3000K
4000K
5000K
6000K

