




149100



149100s

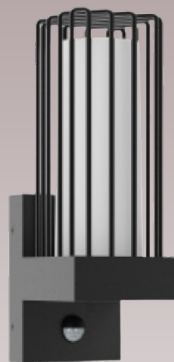

149110

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate Diffuser, UV stabilized with a better light output.

Mounting - LED Surface mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-40°C to 50°C).


Objective

When it comes to picking out lighting fixtures for your area, consider this lighting fixture. Providing ambient lighting over a greater surface area is one of its advantage. This will also give pleasantly light on its area. As an LED, energy savings is expected with the good quality fittings. Completely dustproof. Protected against jets of water.

Obbiettivo

Quando si tratta di scegliere gli apparecchi di illuminazione per la tua zona, considera questo dispositivo di illuminazione. Fornire un'illuminazione ambigua su una superficie maggiore è uno dei suoi vantaggi. Questo darà anche piacevolmente leggero sulla sua area. Come un LED, energia è previsto un risparmio con gli accessori di buona qualità. Completamente antipolvere. Prote o contro getti d'acqua.


	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	149100	6W / 8W / 12W	E27	65	100 lm/W	100 x 125 x 239mm
	149100s	6W / 8W / 12W	E27	65	100 lm/W	100 x 125 x 239mm
	149110	6W / 8W / 12W	E27	65	100 lm/W	100 x 125 x 387mm

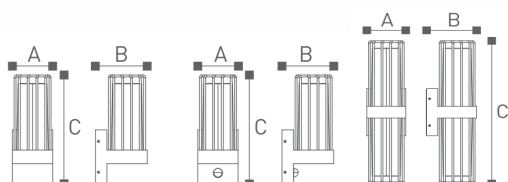

Color Options

W B G

Beam Angle



2700K

3000K

4000K

5000K

6000K

DALI

0-10V

Dimming

1-10V

Dimming