


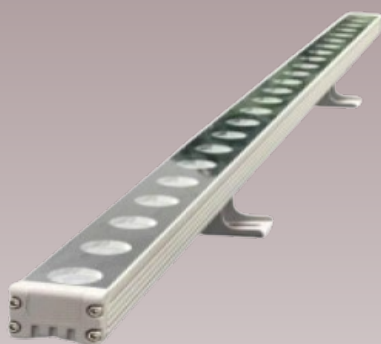

162118 / 24 /36 /48

Description

Housing - Made of 6063 Aluminium alloy body, powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Mounting - LED Surface mounted.

Standards - Manufactured and tested as per PTSP IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-40°C to 55°C).


Objective

This Surface LED Linear is simple and yet have very pleasant and warm output. It is exclusively designed for the architect and designer with imagination and personal style. This surface linear LED ceiling light fixture can be installed easily. Durability and energy consumption is expected on this luminaire. Completely dustproof. Protected against jets of water.


Obbiettivo

Questo Surface LED lineare è semplice e tuttavia ha una resa molto piacevole e calda. È progettato esclusivamente per architetto e designer con fantasia e stile personale. Questa plafoniera lineare da superficie a LED può essere installata facilmente. Durata e consumo di energia previsti per questo apparecchio. Completamente an polvere. Protetto contro getti d'acqua.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	164518	18W	SMD	65	100 lm/W	L1000 x W37 x H65.1mm
	164524	24W	SMD	65	100 lm/W	L1000 x W37 x H65.1mm
	164536	36W	SMD	65	100 lm/W	L1000 x W37 x H65.1mm
	164548	48W	SMD	65	100 lm/W	L1000 x W37 x H65.1mm

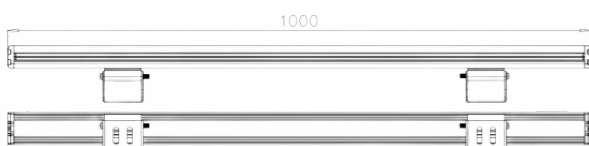


Beam Angle



Color Options

W SG DG B

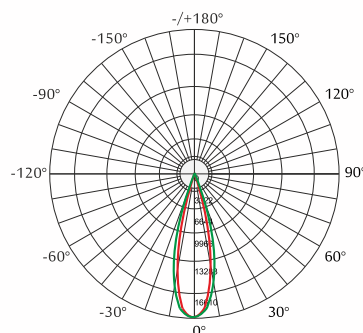

RGB

2700K

3000K

4000K

5000K

6000K

DMX512

DALI

1-10 Dimming

Phase Dimming

