



272401 / 02 / 04 / 06

Description

Housing - Die cast Aluminium material, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Type - LED Trimless Floor Recessed mounted.

Standards - Manufactured and tested as per EN 60598-1 and 60598-2-1.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 60,000 Hrs Life span under temperature (-20°C to 60°C).

Objective


Eco friendly recessed light fittings yet will guaranteed you that this product is durable and will last long. Since this is LED light this will surely saves you from a costly consumption of energy. Expected to provide the great results on minimal consumption.

Completely dustproof.
Protected from temporary immersion.

Obiettivo

Gli apparecchi di illuminazione da incasso vi garantirà tuttavia che questo prodotto è durevole e durerà a lungo. Dato che si tratta di una luce a LED, questo ti farà sicuramente risparmiare da un costoso consumo di energia. Previsto per fornire i grandi risultati sul consumo minimo. Completamente antipolvere. Prote o dall'immersione temporanea.



	CODE	POWER	CHIP	IP	LUMENS	DIMENSION (Ø x H)
	272401	1W	SMD / COB	67	100lm/W	Ø40 x 128mm
	272402	2W	SMD / COB	67	100lm/W	Ø50 x 128mm
	272404	4W	SMD / COB	67	100lm/W	Ø60 x 130mm
	272406	6W	SMD / COB	67	100lm/W	Ø70 x 130mm



Color Options

SG DG B

Beam Angle

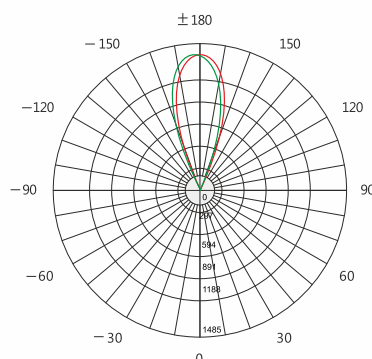

RGB

2700K

3000K

4000K

5000K

6000K

0-10V
Dimming

DMX

