



272501 / 02 / 03 / 04 / 07

Description

Housing - 316 Stainless Steel cover & Aluminium body material, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Type - LED Floor Recessed mounted.

Standards - Manufactured and tested as per EN 60598-1 and 60598-2-1.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 60,000 Hrs Life span under temperature (-20°C to 60°C).

Objective


Eco friendly recessed light fittings yet will guaranteed you that this product is durable and will last long. Since this is LED light this will surely saves you from a costly consumption of energy. Expected to provide the great results on minimal consumption. Completely dustproof. Protected from temporary immersion.

Obbiettivo



Gli apparecchi di illuminazione da incasso vi garantirà tuttavia che questo prodotto è durevole e durerà a lungo. Dato che si tratta di una luce a LED, questo ti farà sicuramente risparmiare da un costoso consumo di energia. Previsto per fornire i grandi risultati sul consumo minimo. Completamente antipolvere. Prote o dall'immersione temporanea.

CODE	POWER	CHIP	IP	LUMENS	DIMENSION (Ø x H)
------	-------	------	----	--------	-------------------

 272501	1W	COB	67	100lm/W	Ø43 x 74mm
 272502	2W	COB	67	100lm/W	Ø53 x 84mm
 272503	3W	COB	67	100lm/W	Ø63 x 89mm
 272504	4W	COB	67	100lm/W	Ø63 x 89mm
 272507	7W	SMD/COB	67	100lm/W	Ø76 x 110mm



Beam Angle

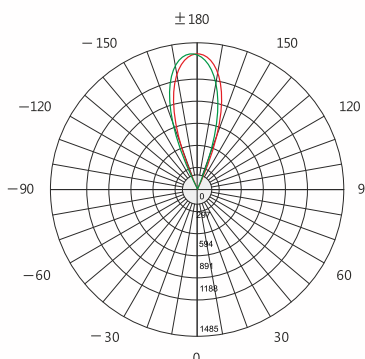

RGB

2700K
3000K
4000K
5000K
6000K

0-10V Dimming
DALI
DMX

Floor recessed

