

273710 / 18 / 36

Description

Housing - Corrosion resistant die cast aluminum housing with choices of RAL Color, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered diffuser, UV stabilized with a better light output.

Mounting - LED trimless recessed luminaire.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 60°C).

Objective

Eco friendly recessed luminaire yet will guaranteed you that this product is durable and will last long. Since this is LED light this will surely saves you from a costly consumption of energy. Expected to provide the great results on minimal consumption.


Completely dustproof.

Protected from temporary immersion.

Obbiettivo

L'apparecchio d'illuminazione di Incasso ecologica vi garantirà tuttavia che questo prodotto è durevole e durerà a lungo. Dato che si tratta di una luce a LED, questo ti farà sicuramente risparmiare da un costoso consumo di energia. Previsto per fornire I grandi risultati sul consumo minimo.

	, ,		Completamente antipolvere. Protetto dall'immersione temporanea.			
СО	DE POWER	CHIP	IP	LUMENS	DIMENSION	
2737	710 10W	SMD	67	100 lm/W	348 x 32.8 x 60.7 mm	
2737	718 18W	SMD	67	100 lm/W	518 x 32.8 x 60.7 mm	
2737	736 36W	SMD	67	100 lm/W	1013 x 32.8 x 60.7 mm	
		Be	am Angle	±180 -150	150 RGB	

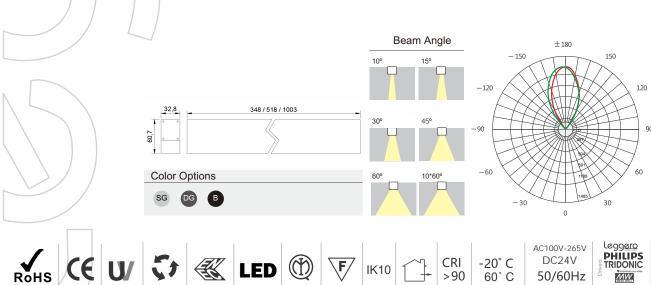



















-20° C 60° C

DC24V 50/60Hz PHILIPS TRIDONIC

BRIDGELUX ☐ CREE

2700K

3000K

4000K

5000K

6000K

