

274420 / 274430

### Description

**Housing** - 304 Stainless steel cover with Die cast aluminum body material, radiation protection, UV with high mechanical resistance.

**Diffuser** - Tempered glass diffuser, UV stabilized with a better light output.

**Type** - LED Floor Recessed mounted.

**Standards** - Manufactured and tested as per EN 60598-1 and 60598-2-1.

**LED** - Energy saving consumption and Durability. Efficiency and quality in wide variation. 60,000 Hrs Life span under temperature (-20°C to 60°C).

### Objective

Eco friendly recessed light fittings yet will guaranteed you that this product is durable and will last long. Since this is LED light this will surely saves you from a costly consumption of energy. Expected to provide the great results on minimal consumption.


Completely dustproof.  
Protected from temporary immersion.

### Obbiettivo

Gli apparecchi di illuminazione da incasso vi garantirà tuttavia che questo prodotto è durevole e durerà a lungo. Dato che si tratta di una luce a LED, questo ti farà sicuramente risparmiare da un costoso consumo di energia. Previsto per fornire i grandi risultati sul consumo minimo.

Completamente antipolvere.  
Prote o dall'immersione temporanea.



|  | CODE   | POWER | CHIP | IP | LUMENS   | DIMENSION (Ø x H) |
|--|--------|-------|------|----|----------|-------------------|
|  | 274420 | 20W   | COB  | 67 | 100 lm/W | Ø210 x 174mm      |
|  | 274430 | 30W   | COB  | 67 | 100 lm/W | Ø248 x 199mm      |

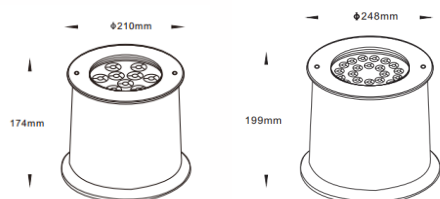

Color Options

SS

Beam Angle

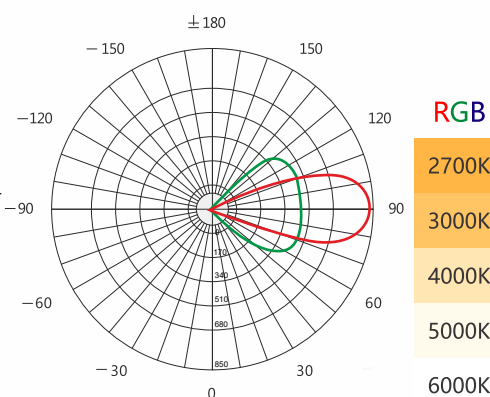

0-10V Dimming  
DALI  
DMX512