



274512 / 18 / 36 / 60

Description

Housing - 304 Stainless steel cover with Die cast aluminum body material, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Type - LEDFloor Recessed mounted.

Standards - Manufactured and tested as per EN 60598-1 and 60598-2-1.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 60,000 Hrs Life span under temperature (-20°C to 60°C).


Objective

Eco friendly recessed light fittings yet will guaranteed you that this product is durable and will last long. Since this is LED light this will surely saves you from a costly consumption of energy. Expected to provide the great results on minimal consumption. Completely dustproof. Protected from temporary immersion.



Obiettivo

Gli apparecchi di illuminazione da incasso vi garantirà tuttavia che questo prodotto è durevole e durerà a lungo. Dato che si tratta di una luce a LED, questo ti farà sicuramente risparmiare da un costoso consumo di energia. Previsto per fornire I grandi risultati sul consumo minimo. Completamente antipolvere. Prote o dall'immersione temporanea.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION(Ø x H D1 D2)
	274512	12W	SMD	67	100 lm/W	Ø150 x 160mm Ø138mm Ø174mm
	274518	18W	SMD	67	100 lm/W	Ø180 x 175mm Ø164mm Ø200mm
	274536	36W	SMD	67	100 lm/W	Ø210 x 174mm Ø194mm Ø230mm
	274560	60W	SMD	67	100 lm/W	Ø248 x 199mm Ø224mm Ø260mm

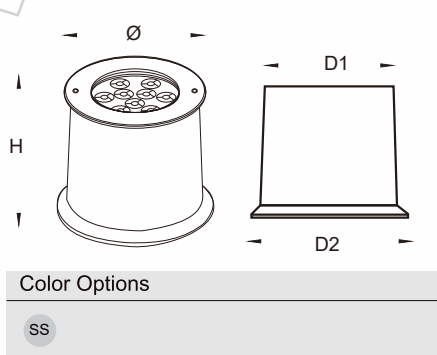

Beam Angle

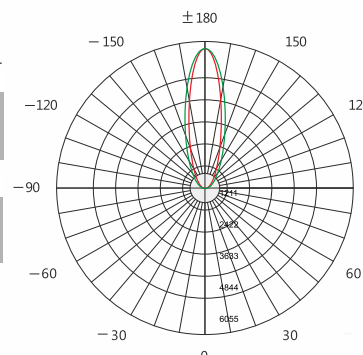

RGB

2700K
3000K
4000K
5000K
6000K

0-10V Dimming
DALI
Bluetooth
DMX

Floor recessed

