



124407 / 15 / 25 / 35

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).


Objective

This luminaire is a good choice in matter of design and power. This high efficiency of the LED source ensures excellent performances and low consumptions. Energy and economy savings are a little advantage compared to the design of this item. Completely dustproof. Protected against jets of water.



Obbiettivo

Questo apparecchio è una buona scelta in termini di design e potenza. Questa elevata efficienza della sorgente LED garantisce prestazioni eccellenti e bassi consumi. Risparmio energetico ed economico sono un piccolo vantaggio rispetto al design di questo prodotto. Completamente antipolvere. Prote o contro ge d'acqua.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	124407	7W	COB	65	95 lm/W	Ø92 x H78mm Ø80mm
	124415	15W	COB	65	95 lm/W	Ø92 x H78mm Ø80mm
	124425	25W	COB	65	95 lm/W	Ø123 x H92mm Ø110mm
	124435	35W	COB	65	95 lm/W	Ø145 x H106mm Ø130mm

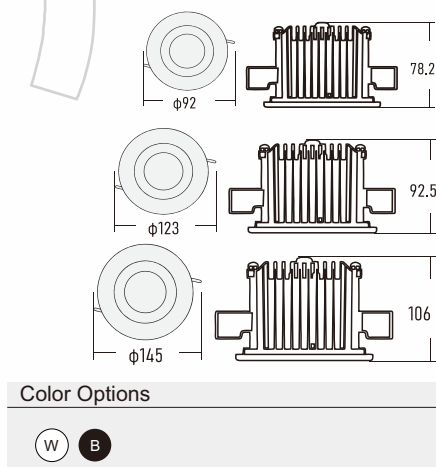

Beam Angle

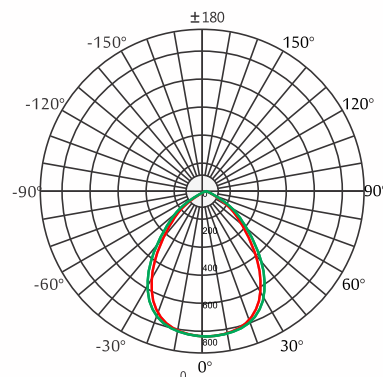

2700K
3000K
4000K
5000K
6000K

DALI
1-10
Dimming
Phase
Dimming