



148101 / 03

Description

Material - Body Made of polycarbonate material powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate diffuser UV stabilized with a better light output.

Mounting - LED Surface wall mounted.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-40°C to 55°C).

Objective

Eco friendly surface luminaire yet will guaranteed you that this product is durable and will last long. Since this is LED light this will surely saves you from a costly consumption of energy. Expected to provide the great results on minimal consumption.

Completely dustproof.

Protected against high-pressure water jets.

Obbiettivo

Questo design unico di apparecchi di illuminazione offre un ambiente piacevole e caldo alla vista. Grazie alle caratteristiche del LED, questo apparecchio offre maggiore efficienza e durata su se stesso. Si prevede un consumo di risparmio energetico a LED. Sono previste resistenza e qualità duratura.


Completamente antipolvere.

Protetto contro i getti d'acqua ad alta pressione.



Surface Ceiling / Wall


	CODE	POWER	TYPE	IP	LUMENS	DIMENSION
	148101	1W	SMD	66	90 lm/W	Ø42 x 101mm
	148103	3W	SMD	66	90 lm/W	Ø42 x 101mm

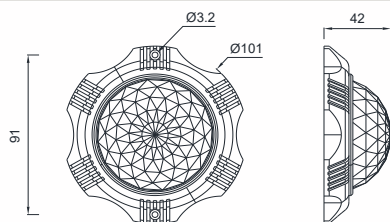

Color Options



Beam Angle



RGB

2700K

3000K

4000K

5000K

6000K

