



184412 / 18 / 25

Description

Housing - Made of Polycarbonate material radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate diffuser, UV stabilized with a better light output.

Mounting - LED Ceiling Surface mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

Eco friendly surface downlight yet will guaranteed you that this product is durable and will last long. Since this is LED light this will surely saves you from a costly consumption of energy. Expected to provide the great results on minimal consumption.


Completely dustproof.
Protected against high pressure water jets.

Obbiettivo

Il downlight di superficie eco-compatibile ti garantirà comunque che questo prodotto è durevole e durerà a lungo. Dal momento che questa è una luce a LED, questo sicuramente ti farà risparmiare da un costoso consumo di energia. Si prevede di fornire ottimi risultati con un consumo minimo.

Completamente antipolvere.
Protetto contro i getti d'acqua ad alta pressione.


	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	184412	12W	SMD	54	80 lm/W	Ø250 x H62mm
	184418	18W	SMD	54	80 lm/W	Ø300 x H62mm
	184425	25W	SMD	54	80 lm/W	Ø380 x H82mm



Color Options

W B G

Beam Angle

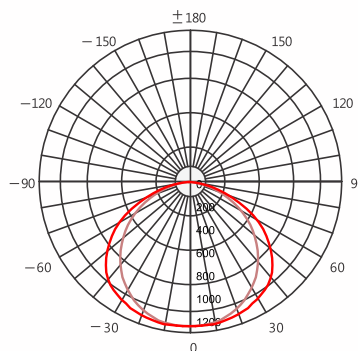

2700K
3000K
4000K
5000K
6000K