


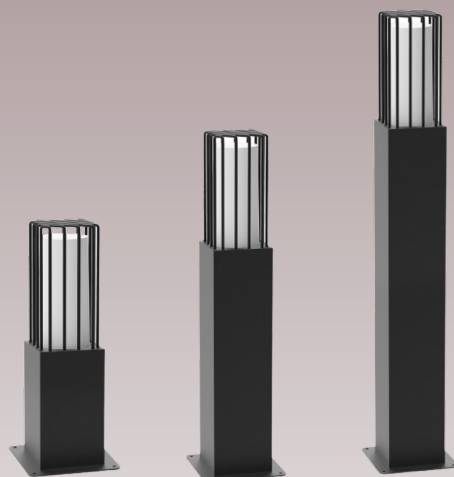

2892000

2892010

2892110

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate Diffuser, UV stabilized with a better light output.

Mounting - LED Surface mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-40°C to 50°C).


Objective

When it comes to picking out lighting fixtures for your area, consider this lighting fixture. Providing ambient lighting over a greater surface area is one of its advantage. This will also give pleasantly light on its area. As an LED, energy savings is expected with the good quality fittings. Completely dustproof. Protected against jets of water.

Obbiettivo

Quando si tratta di scegliere gli apparecchi di illuminazione per la tua zona, considera questo dispositivo di illuminazione. Fornire un'illuminazione ambigua su una superficie maggiore è uno dei suoi vantaggi. Questo darà anche piacevolmente leggero sulla sua area. Come un LED, energia è previsto un risparmio con gli accessori di buona qualità. Completamente antipolvere. Prote o contro getti d'acqua.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	2892000	6W / 8W / 12W	E27	65	100 lm/W	140 x 140 x 400mm
	2892010	6W / 8W / 12W	E27	65	100 lm/W	140 x 140 x 600mm
	2892110	6W / 8W / 12W	E27	65	100 lm/W	140 x 140 x 800mm




Color Options

W B G

Beam Angle

360°



2700K

3000K

4000K

5000K

6000K

DALI

0-10V Dimming

1-10V Dimming

LED Chips
BRIDGELUX
CREE

A++

RoHS

CE

W

Recycling symbol

Energy efficiency symbol

RoHS symbol

F

IK08

CRI >90

-40°C
50°C

85~265V
50/60Hz

Drivers
Leggero